

# IH SERIES

## LED LINEAR HIGH BAY LIGHT



Power: 95W, 150W, 200W, 200W up to 600W replacement  
Beautiful linear style looking



[www.aokledlight.com](http://www.aokledlight.com)


## Overview

Specialized for indoor high bay lighting with excellent evenness;  
 Suitable for factory, warehouse, supermarket, school, etc;  
 Super slim design with gorgeous looking;  
 Highly upgradeable for motion sensor, PIR sensor, smart sensor, etc;  
 System efficacy 130lm/w, lifespan >50000 hours;  
 Support multiple installation methods.




## Installation Methods

Chain /  
 Cable Mount  
 (Standard)

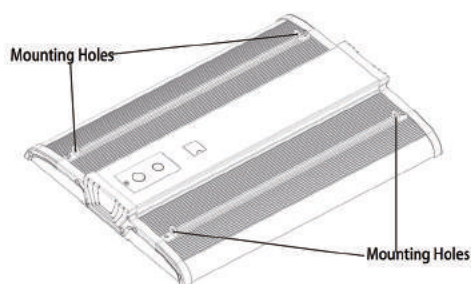


Chain/cable mount is standard and included in price. Price adder for Y-cable, Rod Mount, and Pendant Mount. Please consult sales for latest information and see "Installation Instructions" for mounting details.


Rod Mount  
 (Optional)

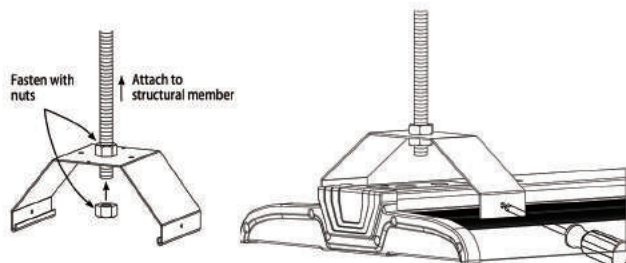

Surface Mount (Optional)

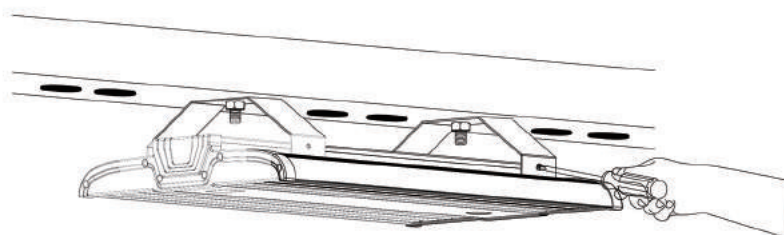

Pendant Mount  
 (Optional)

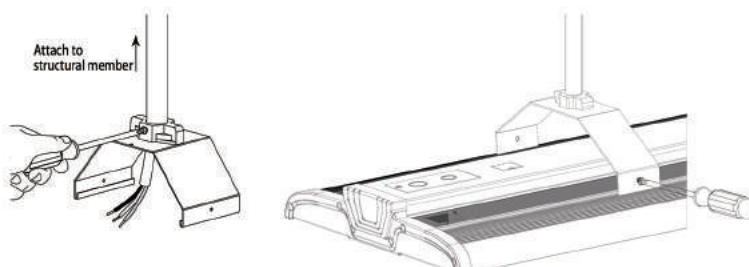

Y-Cable w/hook  
 (Optional)



## AOK iH Series

LED Linear High Bay Light



This product is UL/cUL, DLC, FCC, SAA, CE and RoHS certified



Model	AOK-95WiH	AOK-150WiH	AOK-200WiH
Nominal Wattage	95W	150W	200W
Replacement	250W	400W	600W
Maxium Current	1.05A	1.65A	2.20A
Input Voltage	100-277VAC / 347VAC / 480VAC	100-277VAC / 347VAC / 480VAC	100-277VAC / 347VAC / 480VAC
Dimming	1-10V	1-10V	1-10V
Accessories	Built-in occupancy sensor available	Built-in occupancy sensor available	Built-in occupancy sensor available
Operating Temperature	-40°F~122°F	-40°F~122°F	-40°F~122°F
Power Factor (PF)	>0.95	>0.95	>0.95
THD	<15%	<15%	<15%
Lumen Output (+/- 5%)	13432lm @99.58W, 5700K	20202lm @152.5W, 5700K	26326lm @198.6W, 5700K
System Efficacy	134.89lm/w @5700K	132.47lm/w @5700K	132.56lm/w @5700K
Optical Lens	120° frosted	120° frosted	120° frosted
CRI	Ra>70 / Ra>80	Ra>70 / Ra>80	Ra>70 / Ra>80
CCT	3000-6500K	3000-6500K	3000-6500K
IP&IK Rating	IP66 & IK08	IP66 & IK08	IP66 & IK08
Material	Die-cast alumium	Die-cast alumium	Die-cast alumium
Housing Color	White	White	White
Lifespan	>50000 hours @L70	>50000 hours @L70	>50000 hours @L70
Fixture Dimensions	24*16.5*2.8" (61*42*7cm)	24*16.5*2.8" (61*42*7cm)	24*16.5*2.8" (61*42*7cm)
Net Weight	10 lbs (4.5kg)	10 lbs (4.5kg)	10 lbs (4.5kg)
Carton Dimensions	25.6*18*4.7" (65*46*12cm)	25.6*18*4.7" (65*46*12cm)	25.6*18*4.7" (65*46*12cm)
Gross Weight	13 lbs (5.8kg)	13 lbs (5.8kg)	15.4 lbs (7kg)
Packing	1 Pcs per carton	1 Pcs per carton	1 Pcs per carton